



lanyard


Features of a WORKSafe® Energy Absorbing Lanyard

Energy Absorber

- Available in polyamide webbing
- Equipped with attachment loops at the two ends
- One of the attachment loops is permanently fixed to lanyard
- Body of energy absorber is enclosed in a protective sheath
- Free end attachment loop is connected with karabiner
- Dimension: 160 x 35 x 45mm[†]
- Weight: 160g[†]
- Complies to EN 355 & SS528: Part 2 standards

Kernmantle Polyamide/Polyamide Rope

- Available in kernmantle polyamide*/polyamide*
- Diameter 12mm
- Maximum length 1.8m or 2m*

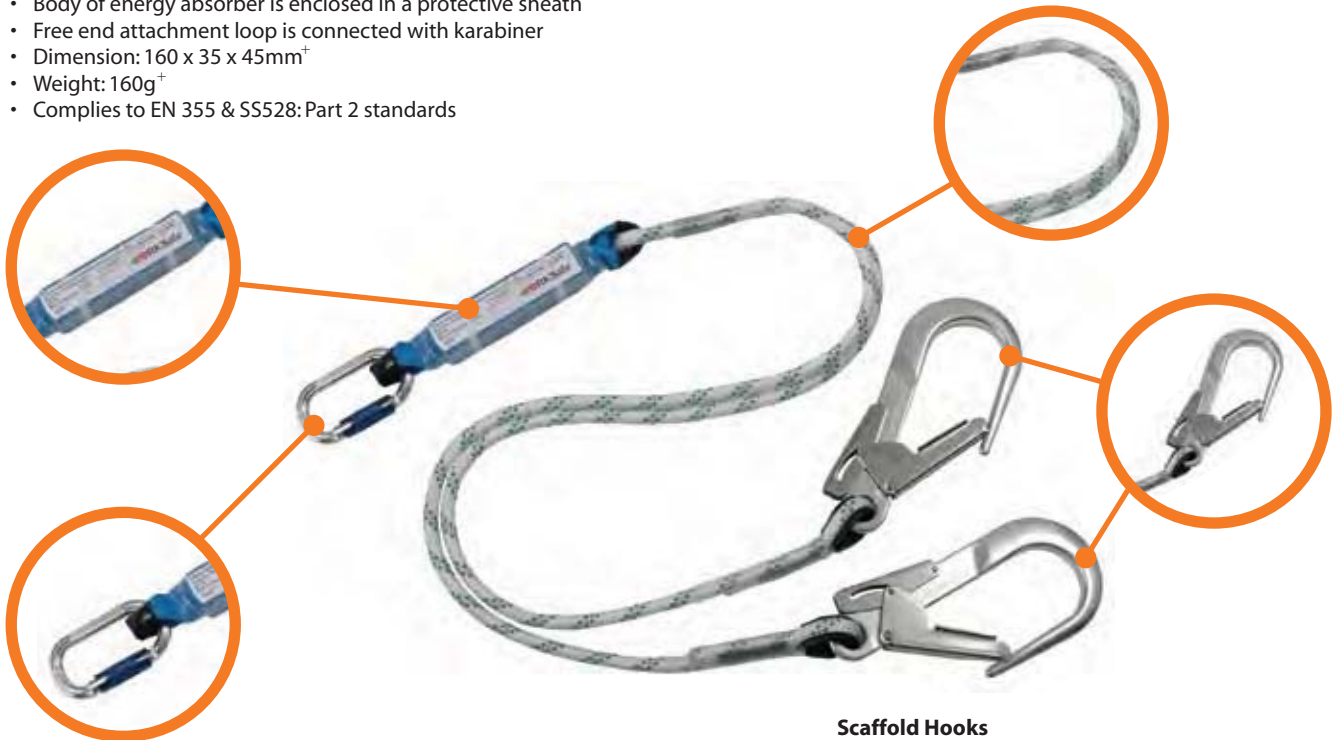

Karabiner

- Steel twist-lock*/screwgate* karabiner
- Complies to EN 362 & SS528: Part 5

Scaffold Hooks

- Available in hot-dipped galvanized steel*/aluminium alloy*
- Corrosion resistant
- Used to connect the individual parts of the fall arrest equipment in a complete system
- Gate opening: 53mm*/60mm*
- Complies to EN 362 & SS528: Part 5 standards

* Dependent on model
[†] For models made in Europe



WSFBW200+LB122/WSFBW200+LB122PSB



WORKSafe® Energy Absorber with Double Rope Safety Lanyard/(PSB Approved)

- Kernmantle polyamide rope & polyamide energy absorber
- Maximum length: 2 x 2m
- Diameter 12mm
- Includes 2 aluminium alloy connecting scaffold hooks & steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards sold separately (PSB approved)
- Aluminium alloy twist-lock karabiner certified with EN 362 & SS528: Part 5 standards sold separately

WSF220K/WSF220K (PSB)



WORKSafe® Energy Absorber with Double Rope Safety Lanyard/(PSB Approved)

- Polyamide rope & energy absorber
- Maximum length: 2 x 1.8m
- Diameter 12mm
- Includes 2 hot-dipped galvanized steel scaffold hooks & steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards (PSB approved)

WSFBW200+LB121/WSFBW200+LB121PSB



WORKSafe® Energy Absorber with Single Rope Safety Lanyard/(PSB Approved)

- Kernmantle polyamide rope & polyamide energy absorber
- Maximum length: 2m
- Diameter 12mm
- Includes 2 aluminium alloy connecting scaffold hook & steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards (PSB approved)

WSF210K/WSF210K (PSB)



WORKSafe® Energy Absorber with Single Rope Safety Lanyard/(PSB Approved)

- Polyamide rope & energy absorber
- Maximum length: 1.8m
- Diameter 12mm
- Includes 1 hot-dipped galvanized steel scaffold hook & 1 steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards (PSB approved)



Made in Europe



Made in Korea