



# lanyard


## Features of a WORKSafe® Energy Absorbing Lanyard

### Energy Absorber

- Available in polyamide webbing
- Equipped with attachment loops at the two ends
- One of the attachment loops is permanently fixed to lanyard
- Body of energy absorber is enclosed in a protective sheath
- Free end attachment loop is connected with karabiner
- Dimension: 160 x 35 x 45mm<sup>†</sup>
- Weight: 160g<sup>†</sup>
- Complies to EN 355 & SS528: Part 2 standards

### Kernmantle Polyamide/Polyamide Rope

- Available in kernmantle polyamide\*/polyamide\*
- Diameter 12mm
- Maximum length 1.8m or 2m\*

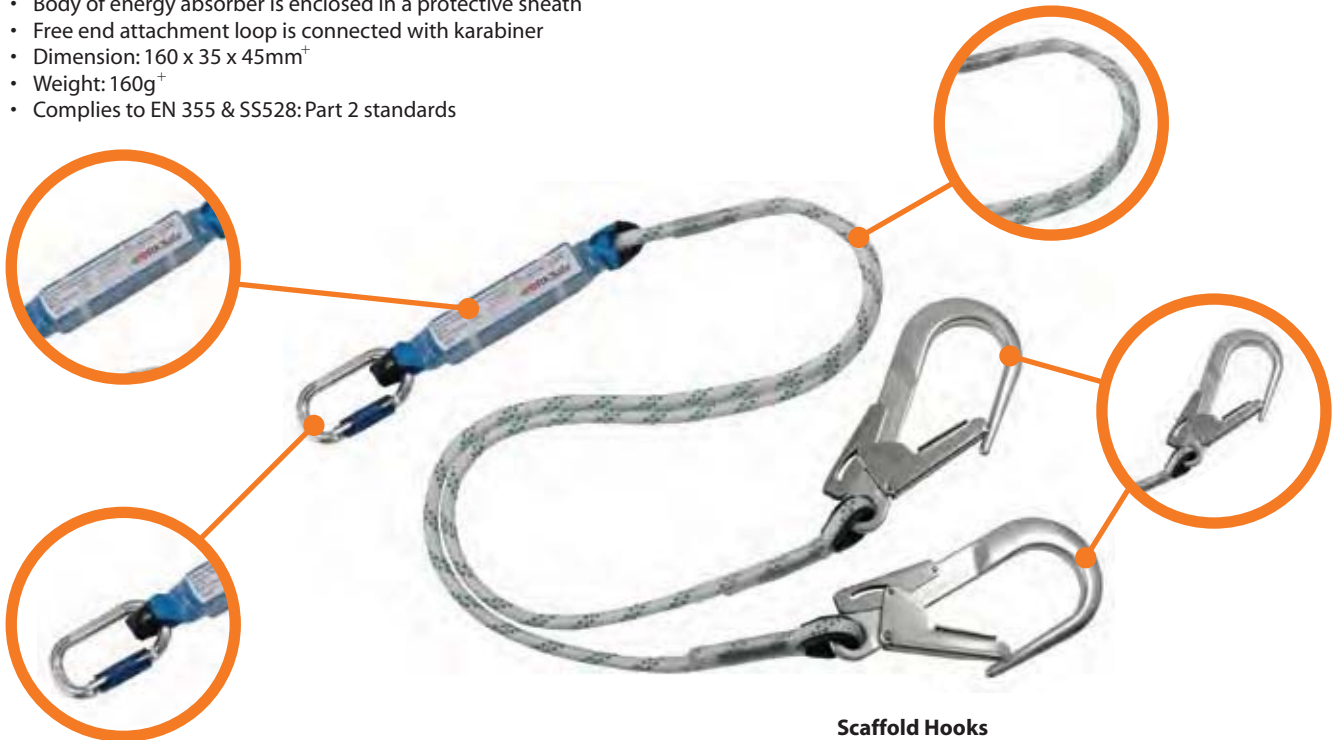

### Karabiner

- Steel twist-lock\*/screwgate\* karabiner
- Complies to EN 362 & SS528: Part 5

### Scaffold Hooks

- Available in hot-dipped galvanized steel\*/aluminium alloy\*
- Corrosion resistant
- Used to connect the individual parts of the fall arrest equipment in a complete system
- Gate opening: 53mm\*/60mm\*
- Complies to EN 362 & SS528: Part 5 standards

\* Dependent on model

<sup>†</sup> For models made in Europe



**WSFBW200+LB122/WSFBW200+LB122PSB**



WORKSafe® Energy Absorber with Double Rope Safety Lanyard/(PSB Approved)

- Kernmantle polyamide rope & polyamide energy absorber
- Maximum length: 2 x 2m
- Diameter 12mm
- Includes 2 aluminium alloy connecting scaffold hooks & steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards sold separately (PSB approved)
- Aluminium alloy twist-lock karabiner certified with EN 362 & SS528: Part 5 standards sold separately

**WSF220K/WSF220K (PSB)**



WORKSafe® Energy Absorber with Double Rope Safety Lanyard/(PSB Approved)

- Polyamide rope & energy absorber
- Maximum length: 2 x 1.8m
- Diameter 12mm
- Includes 2 hot-dipped galvanized steel scaffold hooks & steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards (PSB approved)

**WSFBW200+LB121/WSFBW200+LB121PSB**



WORKSafe® Energy Absorber with Single Rope Safety Lanyard/(PSB Approved)

- Kernmantle polyamide rope & polyamide energy absorber
- Maximum length: 2m
- Diameter 12mm
- Includes 2 aluminium alloy connecting scaffold hook & steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards (PSB approved)

**WSF210K/WSF210K (PSB)**



WORKSafe® Energy Absorber with Single Rope Safety Lanyard/(PSB Approved)

- Polyamide rope & energy absorber
- Maximum length: 1.8m
- Diameter 12mm
- Includes 1 hot-dipped galvanized steel scaffold hook & 1 steel twist-lock karabiner certified with EN 362 & SS528: Part 5 standards
- PSB approved model available
- Tested & approved to EN 355, EN 354 & SS528: Part 2 standards (PSB approved)



Made in Europe



Made in Korea