

Patron



The entire Patron series is exceptionally appealing because of its low weight and high breaking strength. Due to the high strength and the low danger of breaking, Patron ropes are the right choice for many different applications. The high-twist 32-strand mantle braid provides for high dirt resistance, better grip and high abrasion protection.



Features

- Lightweight
- High breaking load
- Excellent grip and handling


Specifications

Core: Nylon
Cover: Nylon
Standard: EN 1891 B (9mm)
 EN 1891 A
 (10mm, 10.5mm, 11mm, 12mm)
Braid: 32



Certifications

- 10.5mm certified with CT Easy Speed and SKR2 according to EN353-2
- 11.0mm certified with PETZL ASAP (B71, B71AAA, B071AA00), only with ASAP'Sorber 20+40 or Absorbica according to EN 353-2
- 11.0mm certified with PETZL ASAP LOCK (B071BAA00) in use with ASAP'Sorber AXESS according to EN 353-2
- 11.0mm certified with Anthon DSD+ and CT Sparrow 200R according to EN341-2A
- 12.0mm certified with Teufelberger Ropstop 3 according to EN 353-2

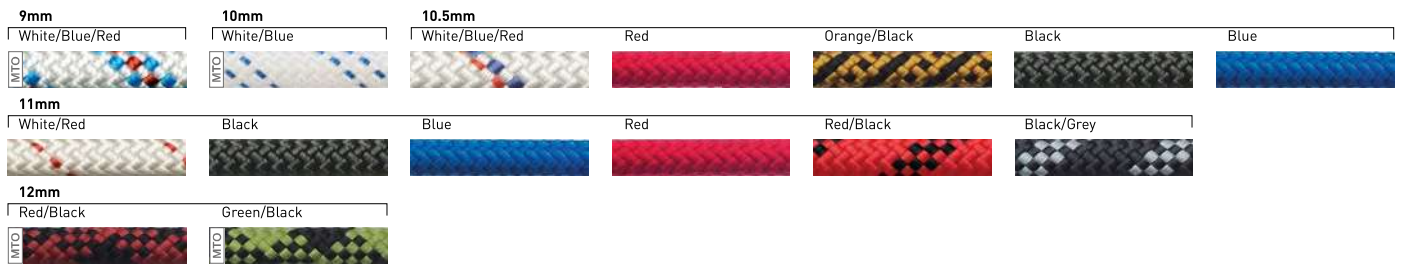

CE test results per EN 1891

Ø	Weight		Shrinkage	Elongation	Min. breaking strength	Cover						
	50-150 kg	Free length				With figure 8 knot	Sewn	Cover				
mm	inch	g/m	lbs/100'	%	%	daN	lbf	daN	lbf	daN	lbf	%
9.0	23/64	51.0	3.43	3.0	3.0	2,000	4,495	1,300	2,920	-	-	41.0
10.0	3/8	66.0	4.44	3.0	3.0	2,900	6,515	1,600	3,595	2,500	5,620	38.0
10.5	13/32	72.0	4.84	4.0	3.0	3,200	7,190	1,800	4,045	2,600	5,845	37.0
11.0	7/16	75.0	5.04	4.0	3.0	3,300	7,415	1,800	4,045	2,700	6,070	36.0
12.0	1/2	92.3	6.19	4.0	3.0	3,800	8,540	2,400	5,395	3,400	7,640	36.0