


WORKSafe fall protection - lifeline component





- · Working load limit: 500kg & breaking force: 22kN
- · Aluminium alloy head with four attaching points
- With webbing and chain
- Weight: 14.3kg with webbing, 17.3kg with chain
- · Complies with EN 795 standards
- Height: 130cm to 230cm
- Diameter: 166 to 236cm



WORKSafe® AT050 Rescue Lifting Device


- · Rescue lifting & lowering device
- Automatic brake
- Steel galvanized cable of diameter 6.3mm
- · Available in 20m and 25m length
- Weight: 13kg
- Working load: 180kg & breaking force: 1800kg
- Complies to EN 1496 Class B standards





Guided type fall arresters, rope grabs, permanent and flexible vertical lifelines

WORKSafe® offers a variety of solutions to ensure a safe and secure environment for personnel working at high altitudes. Our range of Flexible and Rigid Vertical Lifeline Systems comply to EN 353-2, EN 353-1 and SS528: Part 4 standards and are designed to provide maximum freedom of movement and virtually hands-free operation. WORKSafe® Fall Protection allows the user to climb safe and work safe!

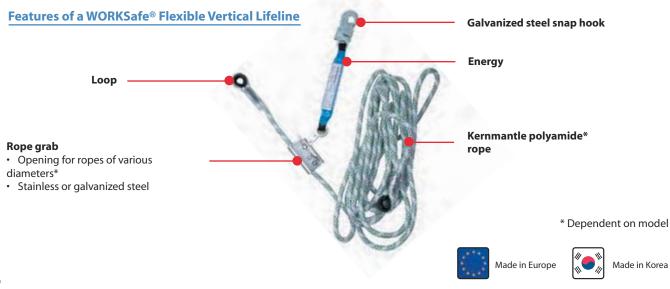

WORKSafe® fall protection - lifeline component





WORKSafe® AC010 Rope Grab with Energy Dissipator & Snap Hook

- Guided type fall arrester on a flexible anchorage line
- Steel rope grab for working rope of diameter 14mm
- Galvanized steel snap hook (opening: 18mm, weight: 220g)
- · Energy dissipator
- Complies with EN 353-2 standards



WORKSafe® AC060 Linostop II Rope Grab with Energy Dissipator & Snap Hook

- Guided type fall arrester on a flexible anchorage line
- Stainless steel rope grab & kernmantle polyamide working rope of diameter 12mm & length in 5m/10m/15m/20m/25m/30m/35m/ 40m/45m/50m
- Galvanized steel snap hook (opening: 18mm, weight: 220g)
- Energy dissipator
- · Complies with EN 353-2 standards



WORKSafe® AC040 Rope Grab

- Guided type fall arrester on a flexible anchorage line
- Stainless steel rope grab for working rope of diameter 12mm
- Complies with EN 353-2 standards



WORKSafe® AC012 Rope Grab

- Guided type fall arrester on a flexible anchorage line
- Galvanized steel rope grab for working rope of diameter 14mm
- Complies with EN 353-2 standards



